

LIGCHINE

SCREEDSAVER ULTRA PLUS



SCREEDSAVER ULTRA PLUS

Introducing the Ligchine SCREEDSAVER® ULTRA PLUS. Born with a long reach and a wide pass, this machine is built to screed more and screed faster. Complete with an ultra heavy-duty boom reaching 20 feet with an all-new High Performance 12.5' screed head. Powering the ULTRA PLUS is a 45 horsepower Kubota turbocharged diesel engine. For increased maneuverability and traction, the ULTRA PLUS includes selectable four-wheel drive with a 2-speed drive range, and four-wheel independent steering. The ULTRA PLUS features a high-tech elevated operator's platform, including a captain's seat, twin joystick controls, and a 7" touchscreen control panel- which also serves as a display for the industry-first SCREEDVIEW™ camera system. On board you will find a built in pressure washer for clean-up, two locking toolboxes, and two high-capacity water tanks.

Key Features: The SCREEDSAVER ULTRA PLUS includes a 12.5' High Performance head, SCREEDSHIFT™ pivoting frame technology, 4 camera SCREEDVIEW™ system, Ligchine Gen 2 Wireless control, and an on-board pressure washer.

Drive & Steering : Selectable 4-wheel drive, with 2-speed drive range, and four wheel independent steering.

Engine: Kubota V1505, 4-cylinder, turbocharged diesel engine.

Lighting System: Front and rear LED pods.


*PRE-PRODUCTION MODEL SHOWN, SPECIFICATIONS SUBJECT TO CHANGE

LIGCHINE.COM

MACHINE DETAILS & SPECS

LIGCHINE

SCREEDSAVER ULTRA PLUS

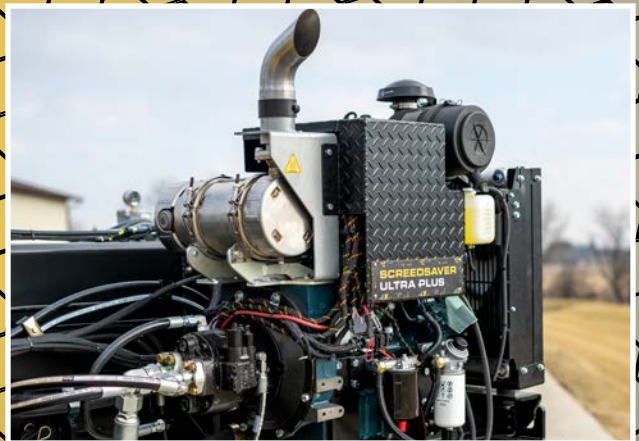

Engine Size	Kubota V1505, 4-cylinder / 3,000 rpm, Turbo-Diesel
Machine Size (retracted)	W - 8' 4" x L - 18' 8" H - 7' 2"
Machine Weight	TBD
Steering System (hydraulic)	4-wheel independent steering
Drive System (hydraulic)	Selectable 4 wheel, with 2-speed drive range
Parallel to the Pour Driving Capable	Yes - 360 degree drive frames (zero turn capable)
Lighting System	2 forward and 2 rear LED light pods
Machine Operation Control	Operator's Platform with Twin Joystick control or 100% Wireless Remote Control
Coverage per screed pass (no overlap)	240 sq. ft.
SCREEDSHIFT™ range of motion	12 degrees total motion: 6 degrees left and right
Boom Reach	20'
Self-contained Concrete Additive Sprayer System	Standard
Diagnostics (hydraulic, electrical, engine and laser)	Dual Parker MD4, 7" touch-screen color display
Machine Length When in Trailer Mode	26' 9"
Grade/Slope/Dual Slope control (standard)	Topcon LS-B110
Contoured Slope 3D Capable (optional)	Topcon 3D mmGPS Satellite control or LPS Robotic

LIGCHINE.COM

MACHINE DETAILS & SPECS